



CCE-210

Conventional 10-zones Fire Alarm Control Panel

Description

The easy-detect BASIC series conventional fire alarm control panels with 10 zones have been designed according to EN54-2 and EN54-4 standards. Its compact size, ease of use for the customer, fast installation and programming makes it ideal for both the end user and installation and maintenance companies.

The BASIC control panels have 4 actions buttons for the end user, easy, intuitive and visible to act in case of alarm or fault (activate / silence sounders, silence panel and reset).

For the installers and maintaining companies they have all the information needed with LED indicators and text associated. These are power failure, system failure, out of order, sounder failure, ground fault, delayed mode, disconnected zone and test zone.

Applications

The BASIC series is ideal for small and medium-size installations, where reliability and power are required, with a capacity of 32 detectors or 10 call points per zone. Thanks to its ABS plastic housing, it allows installation on any surface and the wiring entry is available for the installer.

Technical Features


PANEL	Number of zones:	10	Power supply:	110-240 VAC 50/60 Hz
	Max. current consumption:	2 A @ 240 VAC	Max. detectors per zone:	32
ENVIRONMENT	Battery capacity:	2x 12V – 7.2ah	Max. call points per zone:	10
	Zone output voltage:	18 – 24 VDC	24V auxiliary power output:	1 x 500mA
	Max. cable resistance:	44 Ohm	Voltage-free relay output:	2 A @ 30VDC
PHYSICAL FEATURES	Working temperature:	From -10°C to 55°C		
	Relative humidity:	95% without condensation.		
	IP Index:	IP30		
CERTIFICATION	Size:	345 x 418 x 78 mm		
	Material:	ABS		

CERTIFICATION

EN
54-2

EN
54-4

Dimensions

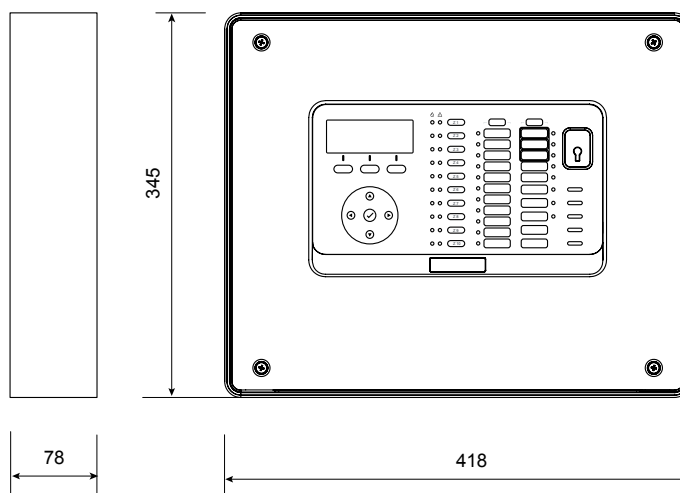

*image only for external dimensions.