



## SBEX BZ2

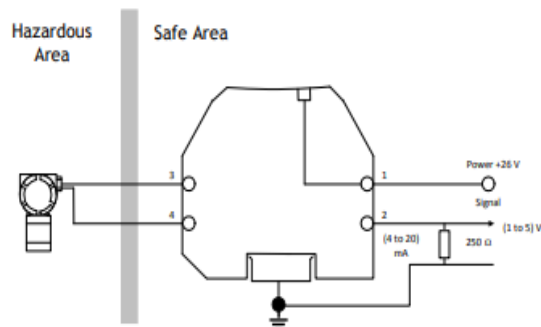
Barrera intrínseca



### Descripción

Barrera de seguridad intrínseca aislada, para detectores y pulsadores Ex.

### Aplicaciones

### Características



Model	Safety description			Polarities available			Application	Basic circuit		Max. end-to-end resistance R	Vwkg at 10 µA or (1 µA) V	V Max	Fuse Rating mA
	V	W	mA	+	-	ac		Hazardous	Safe				
MTL	28	300	93	✓	✓		Transmitters Controller outputs, switches			333 0.9V + 21Ω	26.6 26.6	27.2 27.2	50 50

Please refer to the following link for a full specification / handbooks and the Installation requirements (INM7700)

### CONEXIONADO

### ENTORNO

### CARACTERÍSTICAS FÍSICAS

### CERTIFICACIÓN

### Dimensiones